

## ML JUNIOR

### 4G LTE INTERCOM SPECIFICATION

#### FEATURES AND BENEFITS



- Up to 99 users (50 as standard)
- 316 marine grade stainless steel faceplate with optional anthracite finish
- Low profile, high strength, sealed back box for greater performance and durability
- LED downlight
- Surface or flush mounted\*
- Downward facing microphone
- **THS** Horwood quality sound
- 7 call diverts
- IP64 rated keypad
- Time clock with 9 profiles
- Backlit, vandal resistant keypad with 7 programmable colours
- Timed trade button
- 400 PIN codes for coded entry
- 1300 Authorised dial to open numbers
- Event SMS alerts
- Aux triggered SMS alerts
- Dimensions: H 216 x W 99 x D 40

\* Flush mounted version only available in a stainless steel back box.



#### EASY TO USE

- Each call point has the ability to cascade through 8 landline or mobile numbers. Once answered, if the recipient wants to grant access to the visitor they simply press the # key on their phone.



#### DOWNLOADABLE ACTIVITY LOGS

- Download the last 10,000 interactions with the unit and see who is gaining entry, how and when\*.



#### ACCESS CONTROL

- With built in keypad and dial to open, you can authorise entry to specific individuals with either a PIN code or by registering their mobile number. You can even time restrict entry for certain individuals if required!



#### EASY TO INSTALL

- Minimal cabling:
  - Simply plug (12v) PSU into 240V AC power.
  - Connect relays into entry equipment.
  - Connect antenna and register onto to local mobile network (SIM Card pack provided upon request\*\*).

- No access is required to individual properties for installations or maintenance.




#### TWO YEAR WARRANTY

- Including programming support.
- Thereafter, select your level of cover in line with your specific site requirements.

#### DOWNLOAD THE 'Comm.tel CONTROL' APP

- Easy remote programming to fully control and configure.

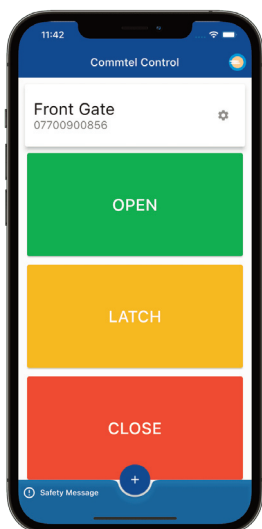

- Please pay particular attention to the Safety Message Contents included on the App front page (View Safety Message).



**OPEN | LATCH | CLOSE**  
at the click of a button  
[www.commtel.io/apps/](http://www.commtel.io/apps/)

\* Activity logs can be downloaded via our Cirrus programming software or upon request from our programming team. Charges may apply.

\*\*Optional and subject to activation order.

## ML JUNIOR

### TECHNICAL SPECIFICATION

- **Power** 12 Volt 1 Amp. DC PSU fitted with a 3A fuse (*supplied and must be dedicated to the Telguard intercom unit*).  
Power Consumption: 120 mA Idle @ 12 Volts.
- **Telephone Type** Standard DTMF (*Dual Tone Multi Frequency*) generating telephone, cordless or mobile phone.
- **Programming** Remotely programmable via Commтел Config App, SMS or Cirrus. We recommend programming is carried out via the installer, or by filling out the programming form on the Commтел website.
- **Relays** 3: 1 x 2A, 2 x 200mA, 2 x Auxiliary inputs.
- **Relay Activation Time** 1 ~ 60 seconds, adjustable locally and remotely.
- **Operating Commands** Default #, 2#, 3#, 4#, 5#, 6#, 7#, 8#, 9#. All relay commands are configurable.
- **Time Clocks** The on-board time clock enables custom profile functions to be activated.
- **Authorised Call Access** 1300 telephone numbers can be stored. Calling the unit, from an authorised telephone number activates the relay.

